

## OVERVIEW




- ✓ **Unique Solution**
- ✓ **Adhesive Based System to Mount in any Fixture**
- ✓ **Field Adjustable Kit**
- ✓ **Line Dimming Optional**

Asymmetrical uplights are a popular product for uplighting high ceilings. The HiLumz AU, asymmetric uplight conversion kit, is easy to install and provides all the benefits of a new LED fixture.

## APPLICATION

- Elliptipar<sup>®</sup> style retrofit kit.
- Pin LED lamps are ineffective with poor heat management.
- The HiLumz Asymmetric kit provides excellent light output with a wide distribution and mounts directly to the lens.
- Installation includes removing adhesive tape cover, pressing to glass, then direct wiring to incoming AC line.
- Should be installed by a certified electrician
- 120-277VAC input
- 150 lumens per watt
- Driver mounted to kit
- 80+ CRI

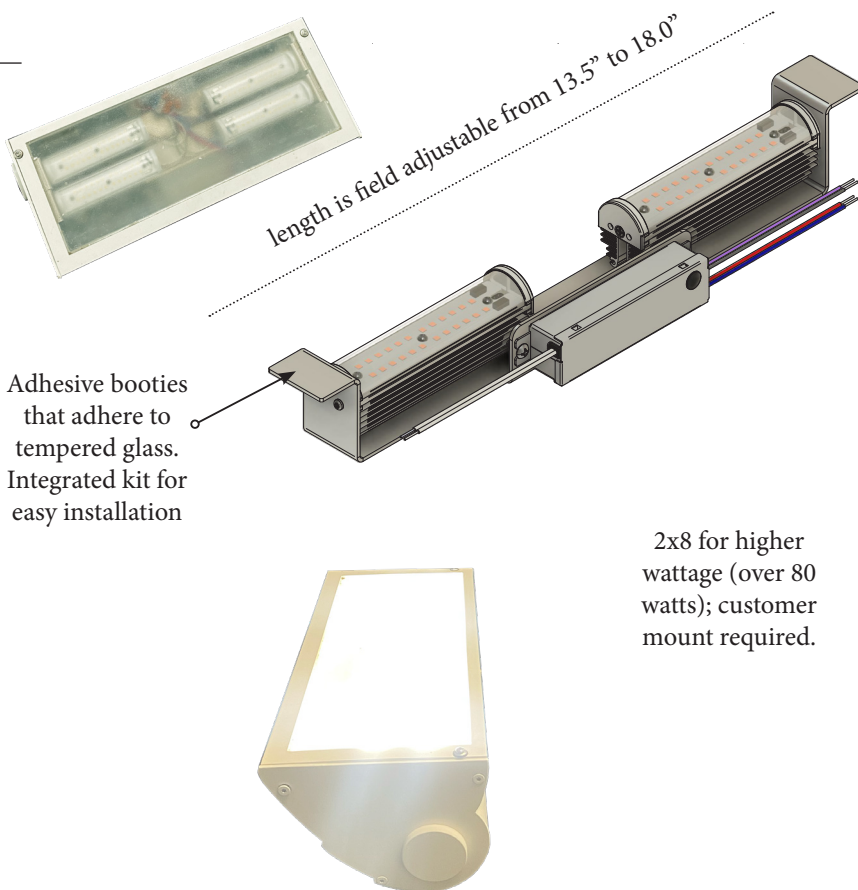


See next page for ordering information  
Please reach out for help specifying the right solution

## SELECTION TOOL & ORDERING



### LENGTH = 8" to 12"

### SINGLE BAR SYSTEM




*External driver*  
8" kit length  
2" kit depth

| Product | # of Bars | Color/CCT | Wattage          | Mount                 | Diffusor                              | Dimming                                              |
|---------|-----------|-----------|------------------|-----------------------|---------------------------------------|------------------------------------------------------|
| HLAU    | 1         | 2280      | 10 (1.5k lumens) | A (adhesive to glass) | C (clear)<br>D (diffused, pixel free) | S (standard, 0-10V)<br>T (triac - 120V line voltage) |
|         |           | 2780      | 15 (2.3k lumens) |                       |                                       |                                                      |
|         |           | 3080      | 20 (3.0k lumens) |                       |                                       |                                                      |
|         |           | 3580      |                  |                       |                                       |                                                      |
|         |           | 4080      |                  |                       |                                       |                                                      |
|         |           | 5080      |                  |                       |                                       |                                                      |

### LENGTH = 14" to 28"


### DUAL BAR SYSTEM



*Integrated driver*  
Adjustable 14" to 18.5" kit length  
3.3" kit depth

| Product | # of Bars | Color/CCT | Wattage          | Mount                 | Diffusor                              | Dimming                                              |
|---------|-----------|-----------|------------------|-----------------------|---------------------------------------|------------------------------------------------------|
| HLAU    | 2         | 2280      | 20 (3.0k lumens) | A (adhesive to glass) | C (clear)<br>D (diffused, pixel free) | S (standard, 0-10V)<br>T (triac - 120V line voltage) |
|         |           | 2780      | 30 (4.5k lumens) |                       |                                       |                                                      |
|         |           | 3080      | 40 (6.0k lumens) |                       |                                       |                                                      |
|         |           | 3580      |                  |                       |                                       |                                                      |
|         |           | 4080      |                  |                       |                                       |                                                      |
|         |           | 5080      |                  |                       |                                       |                                                      |

Please contact us for any of the following

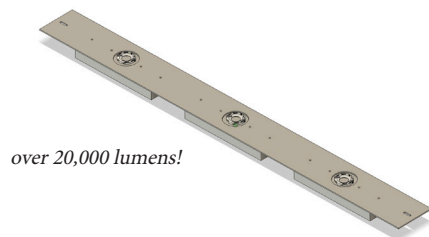

*over 20,000 lumens!*

- **Length > 28"**
- Output needs to be greater than 6,000 lumens
- Lutron compatible (wireless or 3-wire)
- DMX compatible
- RGBW

HiLumz USA  
6835 Shiloh Rd E, C8  
Alpharetta, GA 30005

678-867-9200  
sales@hilumzusa.com